


# 405nm Bundling Laser

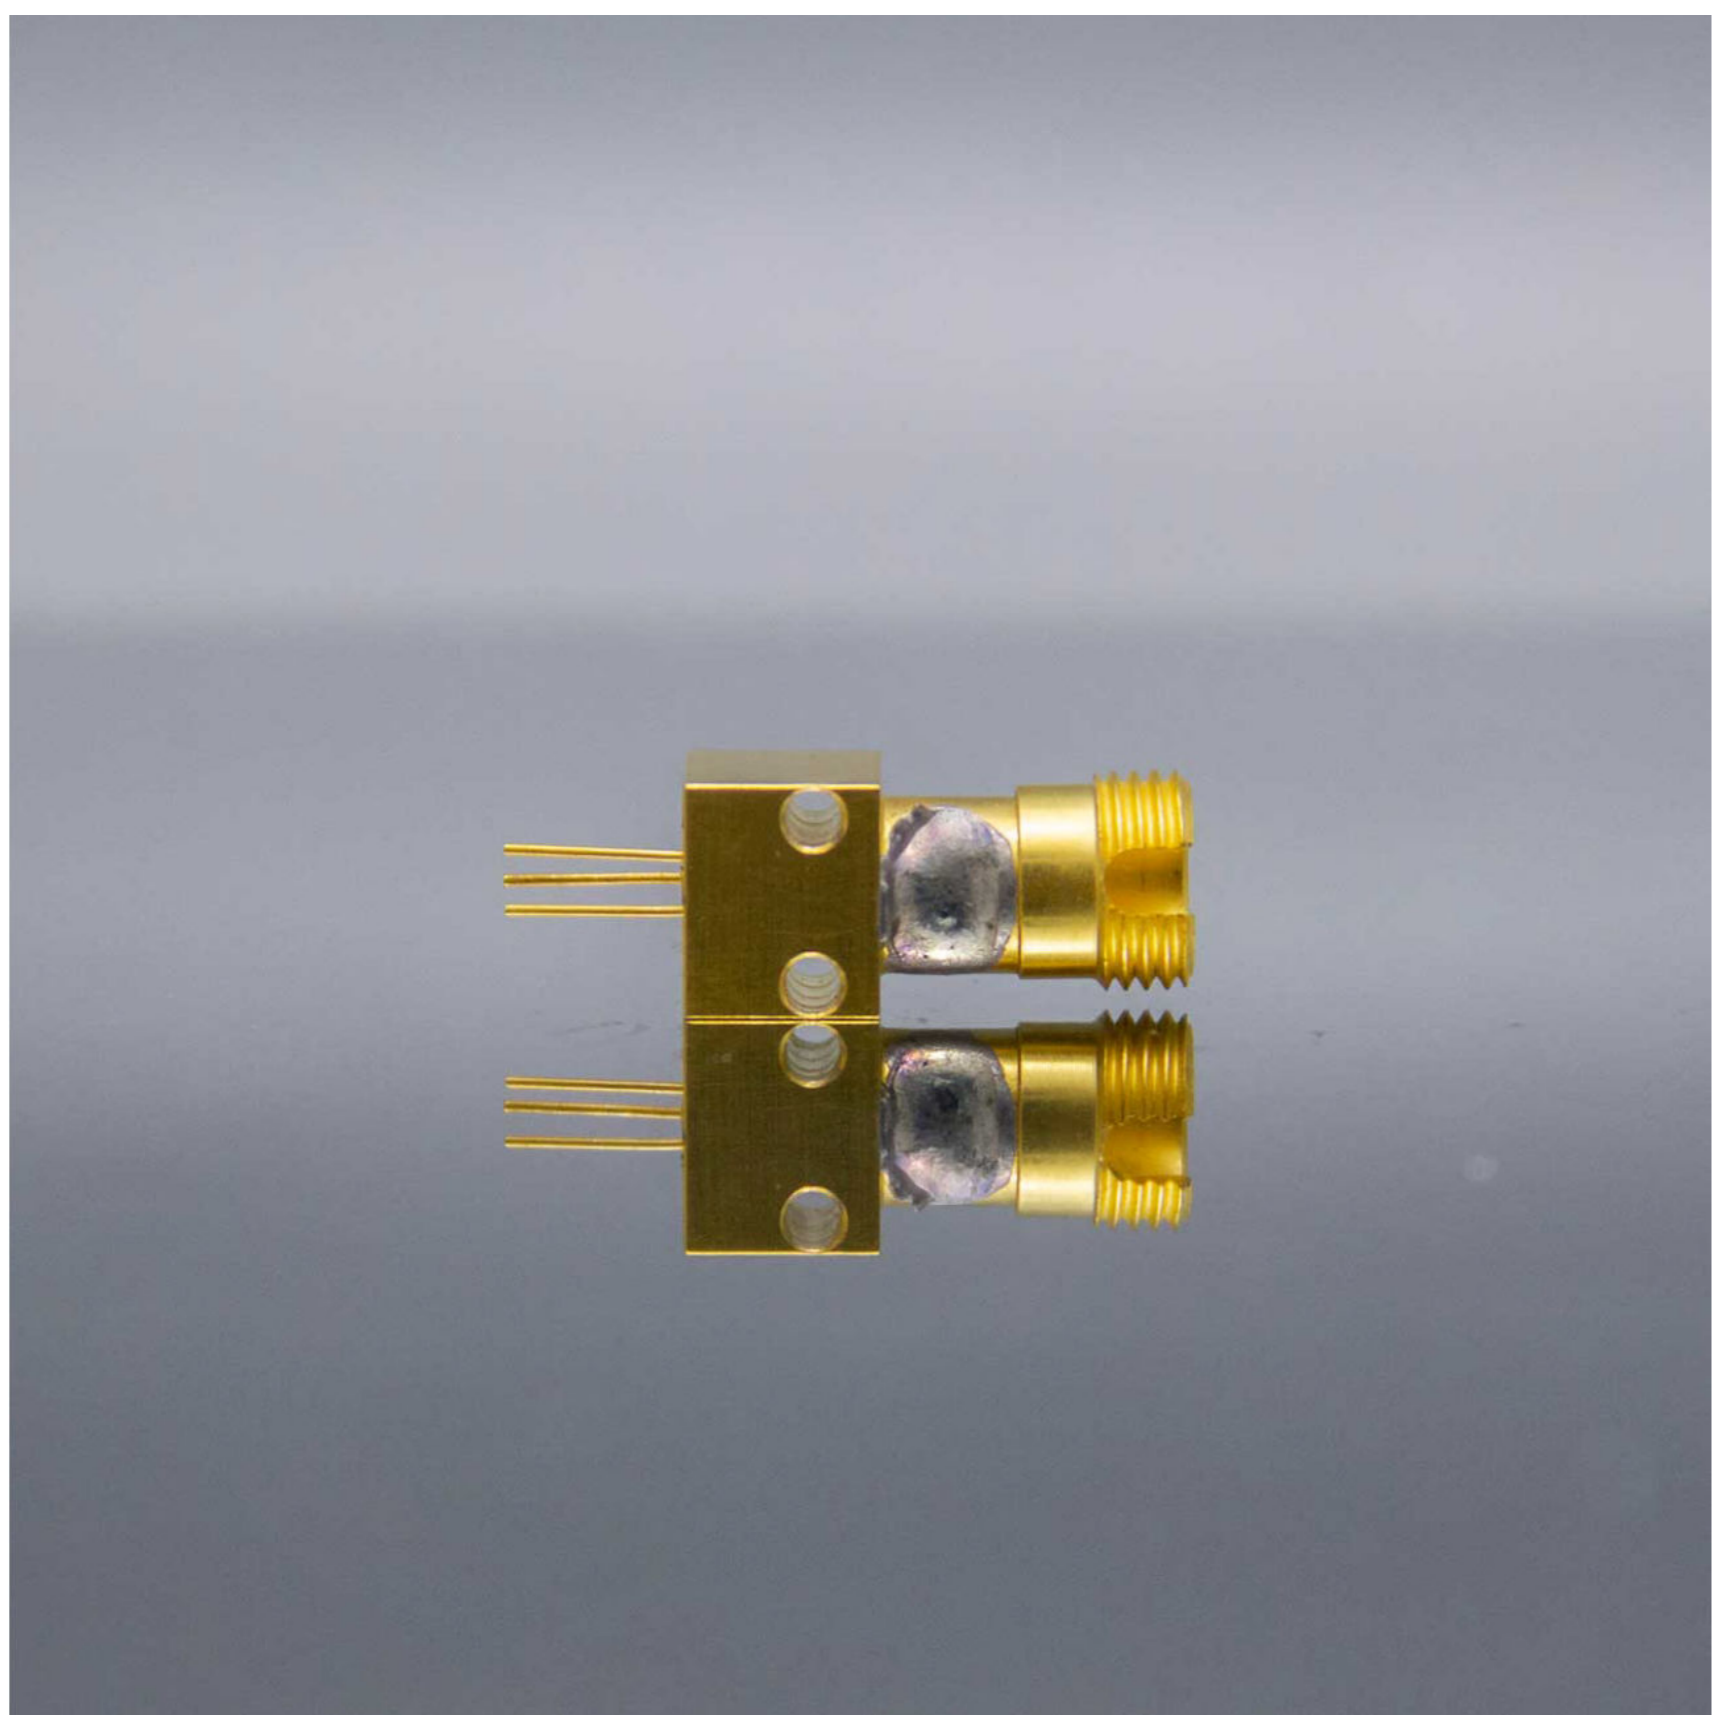

## PARAMETERS

Model	CL405-10-1W-BL01	CL405-10-10W-BL02
Central Wavelength (nm)	405±10	405±10
Number Of Bundles	4	37
Total Power Pop (W)	1	10
Power Stability	<2%@2H	<2%@2H
Fiber Core Diameter (um)	105	105
Fiber Cladding Diameter Dclad (um)	125	125
Optical Fiber Coating Diameter Dbuffer (um)	250	250
Numerical Aperture NA	0.22	0.22
Loose Fiber Length (m)	customizable	customizable
Bundle Fiber Length (m)	customizable	customizable
Connector	Scattered: FC/PC, Binding end: SMA905	
Operating Temperature (°C)	10-30	10-30
Operating Relative Humidity (%)	75	75
Other Parameter		
Storage Temperature (°C)	-20~70	-20~70
Storage Relative Humidity (%)	90	90
Pin Soldering Temperature, Max (°C)	250(10 Sec.)	250(10 Sec.)

## OUTLINE SIZE(mm)

